

BOHNING[®]

2022 CATALOG



**3 VANE ADVANCED
FLETCHING SYSTEM**





7361 N 7 MILE RD., LAKE CITY, MI 49651 - USA
231.229.4247 | www.bohning.com

CAULDRON

QUICK & ACCURATE 3 VANE FLETCHING

**INDEX ANGLE AND PRESSURE
GUARANTEED FOR ANY
DIAMETER ARROW FROM
STRAIGHT TO 3 DEGREE,
RIGHT OR LEFT WITH THE
NOCK ON.**

**EASY SNAP INSERTS TO
CHANGE ANGLE QUICKLY**

• WILL FLETCH:

- STRAIGHT
- 1° LEFT OFFSET
- 1° RIGHT OFFSET
- 3° LEFT HELICAL
- 3° RIGHT HELICAL

- MICRO ARROW DIAMETER
- STANDARD ARROW DIAMETER
- LARGE ARROW DIAMETER

• FLETCH WITH NOCK ON:

- PERFECT INDEXING



OUT OUR FRONT DOOR



What a difference a couple of years makes... a little understated for 2020 and 2021 for sure. We have shared these difficult times with all of you and we want to thank everyone for remaining loyal Bohning customers. We had a great celebration planned for our 75th Anniversary in 2021. Although we faced many restrictions, we shared it with as many of you as possible, and are looking forward to the next 75 years.

"Relentless" describes the pace of 2020 and 2021 pretty well, wouldn't you say? Here at Bohning the sales pace reflected the value of "making what you sell". Our innovative products were bought at a record pace by new and old customers. It is reassuring to see the strength of long-term relationships flourishing in these difficult times.

Bohning accomplished what many called exceptional performance while faced with a challenging supply chain. Our crews met every challenge of sales while upgrading our facilities with new extrusion, injection, sorting, packaging and automation equipment.

We enjoyed the opportunity to see many of you on the shooting circuit in 2021. Our continued commitment to the ASA, IBO, TAC, NASP, S3DA, World Archery, and a number of local and regional organizations is something Bohning is most proud of. We are always thankful for the many kind words we hear while out on the road, and the smiles and laughs that conversations create.

Although things are not quite back to normal, you can expect that everyone here at Bohning is working hard to make it seem normal. We enjoy our everyday lives, which we feel is key to our continued production of some of the very best archery accessories available.

CONTENTS

FLETCHIG JIGS -----	2
NOCKS -----	5
PREMIUM POINTS -----	8
WAXES-----	10
ADHESIVES -----	11
WRAPS -----	14
CUSTOM VANES AND WRAPS -----	17
VANES-----	18
QUIVERS -----	28
BOW CASES -----	30
ACCESSORIES-----	32
STRING ACCESSORIES-----	36
TOOLS -----	38
SERVING -----	39
CROSSBOW -----	40
TRADITIONAL-----	42
APPAREL -----	46
DISPLAYS -----	48
REPLACEMENT PARTS -----	49

TO ORDER:

WWW.BOHNING.COM
231.229.4247
INFO@BOHNING.COM
7361 N 7 MILE RD
LAKE CITY, MI 49651 - USA



CAULDRON®

- Fletches 3 vanes at once
- Easy to switch inserts for different fletching configurations. No tools needed.

- Straight
- 1° Left offset
- 1° Right offset
- 3° left helical
- 3° right helical

- Micro Arrow Diameter
- Standard Arrow Diameter
- Large Arrow Diameter

- Fletch with nock on:
 - Perfect indexing

601025 — Cauldron®

601026 — Adjustable Compression Ring

3 VANE ADVANCED FLETCHING SYSTEM

NEW



MADE IN USA

CHANGE INSERTS WITH A SINGLE SNAP

INDEX ANGLE AND PRESSURE GUARANTEED FOR ANY DIAMETER ARROW FROM STRAIGHT TO 3 DEGREE, RIGHT OR LEFT WITH THE NOCK ON.

EASY SNAP INSERTS TO CHANGE ANGLE QUICKLY

INSERTS INCLUDED WITH THE CAULDRON:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Gray	Plastic Vane	Straight	5" (127mm)	601059
Black	Plastic Vane	3° Right	3" (76mm)	601057
Red	Plastic Vane	1° Right	5" (127mm)	601058
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060

MULTI-FLETCHER®

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Easy clean up — clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles



MADE IN USA

601055 — Multi-Fletcher®


601056 - Clamp Plate

INSERTS INCLUDED WITH THE MULTI-FLETCHER:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Gray	Plastic Vane	Straight	5" (127mm)	601059
Black	Plastic Vane	3° Right	3" (76mm)	601057
Red	Plastic Vane	1° Right	5" (127mm)	601058
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060
Blue	Feather	2° Right	5" (127mm)	601062
Green*	Feather	2° Left	5" (127mm)	601063



**MADE IN
USA**

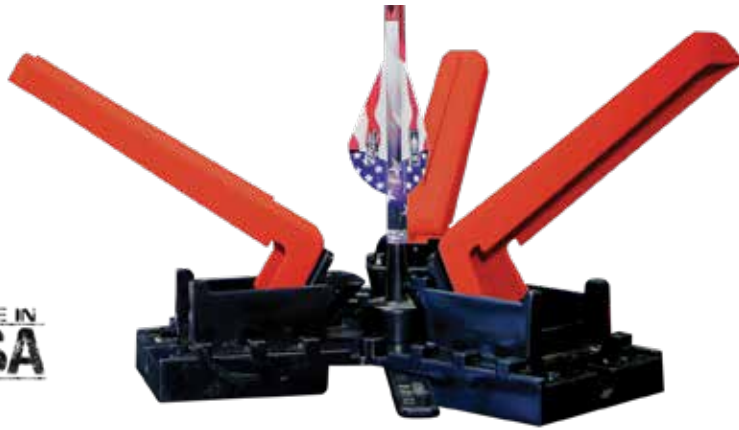

🎯 **PRO TIP:**

FAST, PRECISE AND VERSATILE:

Tower jigs fletch 3 vanes at once and apply more pressure than standard jigs. One base with interchangeable arm options for feathers, plastic vanes, mylar vanes, or Impulse vanes. Choose from straight, one degree (*right or left*) two degree (*right or left*), or three degree (*right or left*) helical arms. Engineering-grade polymer allows you to soak arms in acetone (*up to 1 hour*) to remove CA glue build-up without damaging jig.

COLOR OF ARMS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART #
Gray (solid)	Plastic Vane	Straight	4" (101mm)	1201
Black	Plastic Vane	3° Right	3" (76mm)	1202
Red	Plastic Vane	1° Right	4" (102mm)	1200
Purple	Plastic Vane	3° Left	3" (76mm)	601038
Orange	Plastic Vane	1° Left	4" (102mm)	601037
Yellow	Thin Plastic Vane (e.g. Impulse™)	1° Right	4" (102mm)	601007
Gray w/ Red Clip	Mylar Vane	Straight	3.75" (95mm)	601024
Blue	Feather	2° Right	5" (127mm)	601008R
Green	Feather	2° Left	5" (127mm)	601008L

See page 47 for other Tower® Jig replacement parts

TOWER® JIGS

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fletch all 3 vanes at once with precise 120° spacing
- Applies even pressure along the entire vane base
- Great for single or multiple vane repairs too!

601001 - CROSSBOW TOWER®

- Arms: Straight, 1° Right
- Center Posts: Crossbow

601035 - MYLAR TOWER®

- Arms: Mylar Vane - Straight
- Center Posts: F Nock, Standard, Pin Nock

601006 - IMPULSE TOWER®

- Arms: Thin Plastic Vane - 1° Right
- Center Posts: F Nock, Standard, Pin Nock

601027 - COMPLETE TOWER®

- Great for clubs and families
- All the Tower® Jig components in one purchase

12963 - TRIPLE TOWER®

- Arms: Straight, 3° Right, 1° Right
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

12962 - HELIX TOWER®

- Arms: Straight, 3° Left
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

601010 - FEATHER TOWER®

- Arms: 2° Right, 2° Left
- Center Posts: F Nock, Standard, Swedged

PRO CLASS JIG

- Capable of 3 or 4 fletch (4 at 90° apart)
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm) long

1348 — Straight

1349 — Right Wing

1350 — Left Wing



PRO CLASS CLAMPS

1351 — Straight

1352 — Right Wing

1353 — Left Wing

601020 — 1" (25mm) Vane

Fletching Clamp - Griffin Vane



**MADE IN
USA**

🎯 **PRO TIP:**

HELICALS AND OFFSETS ARE THE SAME THING!

Manufacturers use different ways of classifying helicals and offsets, which can be confusing when making comparisons. First of all, let's clarify that helicals and offsets are essentially the same thing. A helical is defined as any vane angle that is not a 0° straight fletch. An offset is, quite simply, a minor helical and usually refers to anything between 0° and 2°. A vane that is fletched at greater than 2° appears more twisted due to the way it wraps around the shaft, however, a vane fletched at less than 2° still has a helical "twist", it is just less noticeable.

FLETCHING JIGS

BLAZER® HELIX JIG

- 3° right helical on vanes up to 2.5" (64mm) long
- Fits standard shafts 0.293 - 0.306" (7.4 - 7.8mm) OD
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

1344 — Blazer® Helix Jig



BLAZER® STRAIGHT JIG

- Straight fletch on vanes up to 2.125" (54mm) long
- Fits shafts with 0.25" (6mm) OD or smaller
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

1345 — Blazer® Straight Jig




THE BIG JIG

- 3° right helical or 1° right offset on vanes up to 4" (102mm) long
- Fits standard shafts 0.293 - 0.306" (7.4 - 7.8mm) OD
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

1320 — The Big Jig



MADE IN
USA

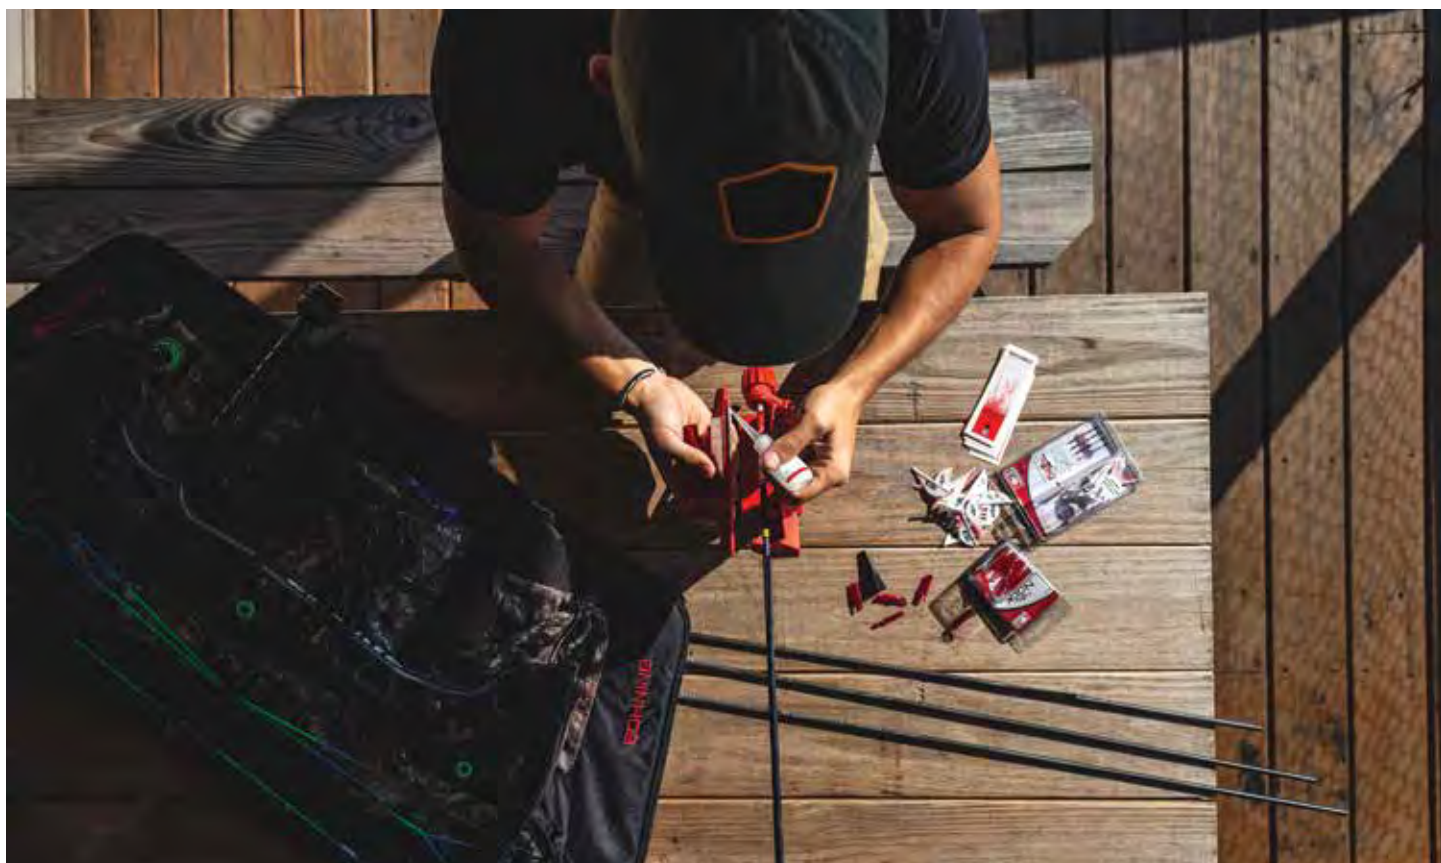



Throat Size
.120" (3.05 mm)
6.5 grains (421 mg)

F NOCK™

● Fits .166" shafts

• Double-lock throat

10141 — 12 pk
10142 — 100 pk
10143 — 1000 pk



Throat Size
.109" (2.77 mm)
12.0 grains (778 mg)

SIGNATURE® NOCK

● Fits .246" shafts
(standard carbon size)

• Smooth throat
• Raised index

1006 — 12 pk
1008 — 100 pk
1009 — 1000 pk



Throat Size
.120" (3.05 mm)
7.0 grains (454 mg)

A NOCK™

● Fits .204" shafts

• Double-lock throat
• Raised index

10151 — 12 pk
10152 — 100 pk
10153 — 1000 pk



Throat Size
.120" (3.05 mm)
7.0 grains (583 mg)

SMOOTH RELEASE INSERT NOCK

● Fits .246" shafts
(standard carbon size)

• Single lock throat for ultimate accuracy
• Raised index

401033 — 12 pk
401034 — 100 pk
401035 — 1000 pk



Throat Size
.120" (3.05 mm)
8.0 grains (518 mg)

H.E. NOCK

● Fits .231" shafts

• Double-lock throat
• Recessed index

401023 — 12 pk
401024 — 100 pk
401025 — 1000 pk



Throat Size
.120" (3.05 mm)
9.0 grains (583 mg)

BLAZER® NOCK

● Fits .246" shafts
(standard carbon size)

• Double-lock throat
• Raised index

1003 — 12 pk
1004 — 100 pk
1005 — 1000 pk

ALL NOCKS ON THIS PAGE
AVAILABLE IN THESE COLORS:

TRANSLUCENT COLOR CHOICES



CL
Clear



RU
Ruby



TG
Tangerine



AP
Apricot



LM
Lime



KW
Kiwi



TL
Teal



EB
Electric Blue



PU
Purple



RS
Rose Pink

SOLID COLOR CHOICES



WH
White



BK
Black



RD
Red



NO
Neon Orange



NY
Neon Yellow



NG
Neon Green



SB
Satin Blue



PRO TIP:

**PRESS FIT NOCK
INSTALLATION:**

Using bowstring wax can be helpful for tight fitting nocks, simply apply wax to the nock shank, insert while rotating until the nock is in the appropriate position.

NEVER push the nock ears against a hard surface, use pliers to twist into place, or bite the nock.

**MADE IN
USA**



Small Throat Size
.106" (2.69 mm)
5.0 grains (324 mg)



Standard Throat Size
.120" (3.05 mm)
5.0 grains (324 mg)



Throat Size
.120" (3.05 mm)
5.0 grains (324 mg)

BLAZER® PIN NOCK

Small Throat

- Marked with the letter "R"
- Raised index

10161 — 12 pk
10162 — 100 pk
10163 — 1000 pk

Standard Throat

- Marked with the letter "V"
- Raised index

10071 — 12 pk
10072 — 100 pk
10073 — 1000 pk

SMOOTH RELEASE PIN NOCK

- Marked with letter "M"
- Redesigned to fit broader range of pin sizes
- Smooth throat and short ears
- Raised index

401030 — 12 pk
401031 — 100 pk
401032 — 1000 pk



PRO TIP:

PIN NOCKS INSTALLATION:

DO NOT use excessive force to install the pin nock onto the adapter as this could cause cracks in the nock and lead to nock failure.



PRO TIP:

All Bohning Pin nocks now accommodate a broader range of pin adapter brands!

**MADE IN
USA**



PRO TIP:

INSPECTING YOUR NOCK

The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This of course could harm you and damage your equipment. When in doubt, replace the nock.

ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS:

TRANSLUCENT COLOR CHOICES



CL
Clear



RU
Ruby



TG
Tangerine



AP
Apricot



LM
Lime



KW
Kiwi



TL
Teal



EB
Electric Blue



PU
Purple



RS
Rose Pink

SOLID COLOR CHOICES



WH
White



BK
Black



RD
Red



NO
Neon Orange



NY
Neon Yellow



NG
Neon Green



SB
Satin Blue



Throat size .115" (2.92 mm)
Weight dependent on size - see below

CLASSIC NOCK

- Glue-on nock for swaged end aluminum, wood and fiberglass shafts
- Index and alignment feature


AVAILABLE SIZES:

- 5/16" (7.94 mm)
Avg. Weight: 10.0 grains (648 mg)
- 11/32" (8.73 mm)
Avg. Weight: 13.0 grains (842 mg)


- 10131** — 12 pk
- 10132** — 100 pk
- 10133** — 1000 pk



TRANSLUCENT COLOR CHOICES



SOLID COLOR CHOICES



Throat size .118" (3 mm)
8.5 grains (551 mg)


APEX NOCK

- Glue-on nock for shafts with an O.D. of 0.197" (5 mm)


401007 — 1000 pk



TRANSLUCENT COLOR CHOICES



SOLID COLOR CHOICES



PRO TIP:

CLASSIC, APEX, T NOCK AND LEGEND NOCK:
To install, simply apply 3-4 drops of Fletch-Tite Platinum, Blazer Bond, or Fletch-Fuse to the tapered end of the shaft. Use light pressure, twist the swaged nock on to the tapered end one full rotation until fully seated.



11.0 grains (713 mg)




9.0 grains (583 mg)

CROSSBOW NOCK

- .300" Half Moon Nock (7.70 mm) **401008** — 12 pk
- .300" Flat Nock (7.70 mm) **401014** — 12 pk
- 401009** — 100 pk
- 401015** — 100 pk
- 401010** — 1000 pk
- 401016** — 1000 pk

SOLID COLOR CHOICES



Weight dependent on size - see below

T NOCK


- Glue-on nock for swaged end aluminum, wood & fiberglass shafts

AVAILABLE SIZES:


- 1/4" T Nock (6.35mm)
Throat size: 0.105" (2.67 mm) Average Weight: 6.0 grains (388 mg)
- 9/32" T Nock (7.14 mm)
Throat size: 0.115" (2.92 mm) Average Weight: 8.0 grains (519 mg)
- 5/16" T Nock (7.94 mm)
Throat size: 0.115" (2.92 mm) Average Weight: 14.0 grains (907 mg)
- 11/32" T Nock (8.73 mm)
Throat size: 0.105" (2.67 mm) Average Weight: 15.0 grains (972 mg)

- 1054T** — 12 pk
- 1055T** — 100 pk
- 1056T** — 1000 pk

SOLID COLOR CHOICES



TRANSLUCENT COLOR CHOICES



Throat size .105" (2.67 mm)

LEGEND NOCK


- Glue-on nock for swaged end aluminum, wood and fiberglass shafts

AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm)
Average Weight 8.0 grains (519 mg)
- 5/16" Legend Nock (7.94 mm)
Average Weight: 11.0 grains (713 mg)

- 1057** — 12 pk
- 1058** — 100 pk
- 1059** — 1000 pk

SOLID COLOR TRANSLUCENT



SCREW-IN

AVAILABLE IN 6, 12, 120, AND 1,200 PACKS (SPECIFY PACK SIZE WHEN ORDERING)

BULLET POINTS AND CONCAVE POINTS



SUPERIOR CONCENTRICITY FOR A TRUE SPIN: GUARANTEED CONCENTRIC WITHIN 0.001" (0.025MM)

ENGINEERED FOR EASY REMOVAL FROM TARGET

INDUSTRY-LEADING WEIGHT TOLERANCES: GUARANTEED ± 0.25 GRAINS (16.2 mg)

MADE IN
USA




SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	BULLET PART #	CONCAVE PART #
17/64"	85 gn (5.5 g)	0.266" (6.75 mm)	851009	851091
	100 gn (6.5 g)		851010	851092
	125 gn (8.1 g)		851011	851093
9/32"	85 gn (5.5 g)	0.281" (7.14 mm)	851012	851076
	100 gn (6.5 g)		851013	851077
	125 gn (8.1 g)		851014	851078
19/64"	85 gn (5.5 g)	0.297" (7.54 mm)	851015	851079
	100 gn (6.5 g)		851016	851080
	125 gn (8.1 g)		851017	851081
5/16"	85 gn (5.5 g)	0.313" (7.94 mm)	851018	851082
	100 gn (6.5 g)		851019	851083
	125 gn (8.1 g)		851020	851084
21/64"	85 gn (5.5 g)	0.328" (8.33 mm)	NA	851085
	100 gn (6.5 g)		851021	851086
	125 gn (8.1 g)		851022	851087
11/32"	85 gn (5.5 g)	0.344" (8.73 mm)	NA	851088
	100 gn (6.5 g)		851023	851089
	125 gn (8.1 g)		851024	851090

SCREW-IN POINT FIT GUIDE

PLACE YOUR SHAFT HERE

(start at largest diameter and move right until white dotted line is not visible)

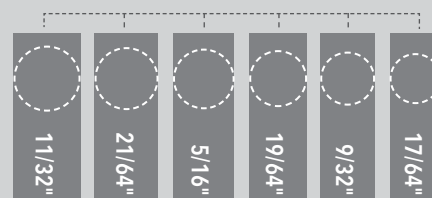

(see conversion chart below for metric)

CONVERSION CHART

17/64"	0.266"	6.75 mm
9/32"	0.313"	7.14 mm
19/64"	0.296"	7.54 mm
5/16"	0.313"	7.95 mm
21/64"	0.328"	8.33 mm
11/32"	.0344"	8.74 mm

TO FIND OUT WHICH POINT FITS YOUR ARROW
VISIT WWW.BOHNING.COM

PRO TIP:

Coat the threads of the screw-in point with a solid wax, like Tex-Tite, Seal-Tite, or Grit Guard, prior to installing as this will help prevent it from loosening.

GLUE-IN

AVAILABLE IN 12 PACKS







PIN POINTS

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
	100 gn (6.5 g)	Black Eagle.	851036
	150 gn (9.7 g)		851037
	180 gn (11.7 g)		851038
	120 gn (7.8 g)	Black Eagle.	851039
	180 gn (11.7 g)		851040
	210 gn (13.6 g)		851041
	250 gn (16.2 g)		851042
	100 gn (6.5 g)	Carbon Express.	851030
	120 gn (7.8 g)		851031
	150 gn (9.7 g)		851032
	180 gn (11.7 g)	Carbon Express.	851075
	120 gn (7.8 g)		851063
	150 gn (9.7 g)		851064
	180 gn (11.7 g)		851065
	100 gn (6.5 g)	Carbon Express.	851047
	120 gn (7.8 g)		851048
	150 gn (9.7 g)		851049
	150 gn (9.7 g)	Carbon Express.	851068
	180 gn (11.7 g)		851069
	210 gn (13.6 g)		851070
	250 gn (16.2 g)		851071
	150 gn (9.7 g)	Easton.	851001
	200 gn (13.0 g)		851002
	150 gn (9.7 g)	Easton.	851003
	200 gn (13 g)		851004
	150 gn (9.7 g)	Easton.	851005
	200 gn (13.0 g)		851006
	150 gn (9.7 g)	Easton.	851028
	200 gn (13.0 g)		851029
	200 gn (13.0 g)	Easton.	851007
	300 gn (19.4 g)		851008
	100 gn (6.5 mg)	Easton.	851094
	150 gn (9.7 mg)		851095
	180 gn (11.7 mg)		851096

PRO TIP:

To install glue in points use Ferr-L-Tite for aluminum arrows and Ferr-L-Tite Cool Flex for carbon arrows or carbon hybrid arrows.

PIN POINTS (CONT.)

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
	100 gn (6.5 g)	Easton.	851033
	120 gn (7.8 g)		851034
	150 gn (9.7 g)		851035
	100 gn (6.5 g)	Easton.	851050
	150 gn (9.7 g)		851051
	180 gn (11.7 g)		851052
	150 gn (9.7 g)	Easton.	851066
	180 gn (11.7 g)		851067
	100 gn (6.5 g)	Gold Tip.	851053
	120 gn (7.8 g)		851054
	150 gn (9.7 g)		851055
	120 gn (7.8 g)	Gold Tip.	851072
	180 gn (11.7 g)		851073
	210 gn (13.6 g)		851074
	100 gn (6.5 g)	Victory.	851060
	150 gn (9.7 g)		851061
	180 gn (11.7 g)		851062
	100 gn (6.5 g)	Victory.	851056
	120 gn (7.8 g)		851057
	100 gn (6.5 g)	Victory.	851058
	120 gn (7.8 g)		851059
	120 gn (7.8 g)	Victory.	851043
	180 gn (11.7 g)		851044
	210 gn (13.6 g)		851045
	250 gn (16.2 g)		851046

BREAK-OFF

SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	PART #
" data-bbox="512 800 542 951"/> 0.166"/4.22 mm Type I	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts up to 0.218" (5.54mm)	851025
" data-bbox="512 800 542 951"/> 0.166"/4.22 mm Type II	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.219"-0.228" (5.56 - 5.79mm)	851026
" data-bbox="512 800 542 951"/> 0.166"/4.22 mm Type III	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.229" (5.82mm) and up	851027

WAXES



SEAL-TITE®

- Silicone-based bowstring wax
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Vegan

1360 — 0.92 oz Tube
(28 grams)

1360Box — 1 box 1.41 oz
(40 grams)

BULK OPTIONS:

1631 — 24 tubes
1631BOWL - Bowl and 24pk
35001 — 250 tubes
3500 — 500 tubes

1631Box — 24 boxes
35001Box — 250 boxes
3500Box — 500 boxes



TEX-TITE®

- Natural-based bowstring wax
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

1306 — 0.92 oz Tube
(28 grams)

1306Box — 1 box 1.41 oz
(40 grams)

BULK OPTIONS:

1630 — 24 tubes
1630BOWL - Bowl and 24pk
32001 — 250 tubes
3200 — 500 tubes

1630Box — 24 boxes
32001Box — 250 boxes
3200Box — 500 boxes



XCCELERATOR WAX®

- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

1365 — 0.51 oz Tube
(14.5 grams)

BULK OPTIONS:

1634 — 16 tubes
1634BOWL - Bowl and 16 pk
1365-250 - 250 Tubes



STRING SHIELD®

- Silicone-based liquid wax
- Sponge-top applicator
- Odorless and waterproof
- Vegan

301019 — 1.18 oz tube
(35 ml)

BULK OPTIONS:

301019-16 - 16 Tubes
301019-250-250 Tubes



GRIT GUARD™

- Non-tacky bowstring wax formula prevents dirt from collecting on strings
- Odorless and waterproof
- Premium conditioners
- Convenient drop side box container made from 100% recycled plastic
- Vegan

301026 — 1 box 1.41 oz
(40 grams)



PRO TIP:
STRING SHIELD'S™
liquid formula
penetrates fibers of
individual strands
on string.

Ⓢ **PRO TIP:** SEAL-TITE® and TEX-TITE® are available in convenient and simple to use drop side boxes for the easiest bow string wax application on the market. No more wax melting out of a tube and all over your bow case and expensive equipment.

Ⓢ **PRO TIP:** OTHER USES FOR SEAL-TITE®, TEX-TITE®, AND GRIT GUARD™

- Apply to nock shank on press-fit nocks for easier insertion and indexing.
- Apply to pin bushings for easier installation and indexing of tight-fitting pin nocks.
- Apply to point and broadhead threads to keep them from loosening and to help prevent rust.

TABLETOP DISPLAY - GREAT POINT-OF-PURCHASE ITEMS



1631BOWL



1630BOWL



1634BOWL

BOWSTRING APPLICATION:

SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD
STEP 1 (ALL WAXES): Start with a clean string: using a rag dipped in warm water, or by wrapping a serving thread around the string and moving it up and down, remove dirt and old wax.				
SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD - SEAL-TITE BOX - TEX-TITE BOX
STEP 2: Warm the tube of wax by rolling it between your hands. Remove the lid and push or twist the bottom to move the wax up in the tube. Apply wax liberally to bowstrings. Rub wax into the string fibers briskly using your fingers or a leather strip - as wax warms, it melts into the string fibers.			Step 2: Apply thin coat to bowstring using the foam applicator	Step 2: Lower the sides of the applicator box and apply wax liberally to bowstrings. Rub wax into string fibers using your fingers or leather strip - as the wax warms, it melts into the string fibers



FLETCH-TITE PLATINUM*

- Solvent-based glue designed for vanes, feathers and swedged nocks
- Works on carbon, aluminum, wood, fiberglass, wraps and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 47
- Industry standard for over 70 years

1301 — 3/4 oz Tube (22.1ml)

BULK OPTIONS:

301040 — 40 pk

301030 — 200 pk

301006EQ — 6 pk*

301040EQ — 40 pk*

301030EQ — 200 pk*

EQ Come in clamshell package

1356 — Pint (473.1 ml)

1357 — Quart (946.4 ml)

1358 — Gallon (3.79 l)

*Packed to meet "Excepted Quantities" International ocean and air transportation requirements in order to reduce dangerous goods fees.

WARNING: Cancer and Reproductive Harm.
www.P65Warnings.ca.gov.



FLETCH FUSE™

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 30 seconds, cure time 2 hours
- Budget-friendly

301025 — 1/2 oz Bottle (17.2 ml)

BULK OPTIONS

301025-24 - 24 Bottles

301025BOWL - Bowl and 24 pk



INSERT IRON™

- Designed for points and inserts
- Works on all shaft types
- 48 hour cure time (72 hours if air is dry)

1317 — 1 oz Bottle (29.6 ml)



BLAZER BOND*

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 20 seconds, cure time 2 hours
- Use a very thin bead or several dots spread out for best adhesion
- Works well in humid conditions

301015 — 1/2 oz Bottle (17.2 ml)

301016 — 1 oz Bottle (29.6 ml)



DISPENSER BOTTLES

- 2 oz (59.1 ml) bottle for use with Fletch-Tite Platinum
- Deluxe bottle has a smaller opening for easier/cleaner application

1303 — Regular

1304 — 6 pk regular (red) replacement nozzles and caps

13031 — Deluxe

13032 — 6 pk deluxe (white) replacement nozzles and caps

CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH-TITE PLATINUM	Vanes Feathers Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	5 Minutes	Minimum: 24 hours 48 hours is best

USEFUL INFORMATION:

- Flexible (non-brittle) bond - absorbs shock when shooting into a target repeatedly
- Does not crack or become brittle.
- Along with other applications, use this glue on tip and tail of vanes or feathers for added security.
- Easy jig clean-up - simply scrape glue off. Do not use knife or any sharp instruments
- Best in low humidity applications.
- Two year expiration on unopened tubes.
- Do NOT store solvent-based adhesives in the refrigerator.

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
BLAZER® BOND**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	20 Seconds	2 Hours

USEFUL INFORMATION:

- Fastest curing time.
- Instant, rigid-bonding glue.
- Medium viscosity (Bohning's most liquid CA glue).
- Begins curing on contact.
- Best for high humidity application.
- One year expiration on unopened tubes.

** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH FUSE**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	30 Seconds	2 Hours

USEFUL INFORMATION:

- Instant, rigid-bonding glue
- Medium viscosity (thicker than Blazer Bond)
- Begins curing on contact
- Best for high humidity application
- One year expiration on unopened tubes

** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
INSERT IRON	Points Inserts Outserts	Carbon Cedar Aluminum Fiberglass	n/a	48 Hours (72 Hours if air is dry)

USEFUL INFORMATION:

- Strongest glue.
- Insert Iron expands when curing. Hold point or insert in place while curing
- Cures with moisture - best when applied in humid conditions
- One year expiration on unopened bottles
- Do NOT store in the refrigerator

ADHESIVES

HOT MELT ADHESIVES



CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE	Points Inserts Outserts	Cedar Aluminum	n/a	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive. • Heat reversible on aluminum shafts - flame required • No expiration.				

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
COOL FLEX	Points Inserts Outserts Pin Bushings	Carbon Aluminum Fiberglass	N/A	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive (low melt) • No expiration.				

FERR-L-TITE® FOR USE WITH ALUMINUM ARROW

- Designed for points and inserts
- Recommended for wood and aluminum shafts
- Not for carbon shafts
- Heat-reversible on aluminum shafts—high temperature required
- Melting point of 350° F (176.7° C)
- Industry standard for 75 years

1309 — 12 Gram Stick

BULK OPTIONS:

1339 — 1 lb. Brick (453.6 g)
1633 — 16 Sticks (Bulk)
31001 — 250 Sticks (Bulk)

COOL FLEX® FOR USE WITH CARBON ARROW

- Designed for points, inserts and bushings
- Recommended for carbon, aluminum and fiberglass shafts
- Fully cured when it reaches room temperature
- Use hot water for adjustment, replacement or removal
- Melting point of 280° F (137.8° C)

1308 — 12 Gram Stick

BULK OPTIONS:

1368 — 1 lb. Brick (453.6 g)
13081 — 16 Sticks (Bulk)
13082 — 250 Sticks (Bulk)

ALCOHOL BURNER

- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

1315 — Burner

1316 — Replacement wick



NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCHING TAPE	Feathers Mylar Vanes	All	N/A	Immediate
USEFUL INFORMATION: • Pressure sensitive adhesive • No expiration				

PREMIUM FLETCHING TAPE

- Designed for feathers and mylar vanes
- Works on all shaft types
- Length 60' (18.3m), width 0.188" (4.8mm)
- Machine-cut without lubricant so no dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers

1649

FLETCHING TAPE DISPENSER

- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris
- Refillable; includes 1 roll of premium fletching tape
- Screw holes for easy mounting

801099



PRO TIP:

CHOOSING AN ADHESIVE

When choosing an adhesive, it is always best practice to choose one that has been tested and proven to work best for your application. Bohning adhesives have been tested over thousands of fletches, nocks and inserts. For the best performance of your adhesives, be aware of several factors that may affect adhesion, including: humidity, application, and time required for cure.



PRO TIP:

BASIC FLETCHING INSTRUCTIONS:

1. Make sure that jig is correctly set up so that the clamp/arm seats firmly to the shaft for the entire length of the vane. Test this by dry fitting shaft and vane in jig without glue.
2. Place vane at the desired height in the clamp/arm to get desired distance from the nock.
3. For Fletch-Tite Platinum apply adhesive over the entire vane base. For Blazer Bond and Fletch-Fuse apply several dots of adhesive along the vane base and then use the tip of the bottle to spread the adhesive along the length of the base.
4. Clamp the vane in the jig for 5 minutes for Fletch-Tite Platinum, 20 seconds for Blazer Bond and 30 seconds for Fletch-Fuse.
5. Carefully remove arrow from the jig, and allow Fletch-Tite Platinum to cure for 24-48 hours, Blazer Bond and Fletch-Fuse for 2 hours before use.

ADHESION TROUBLE-SHOOTING

The best prevention for adhesion problems is to properly clean your arrows using Bohning SSR Powder. ****DO NOT** clean Bohning Vanes.

Follow the correct clamp and cure time for the adhesive that you are using.

Make sure your fletching area and hands are free from spray lubricants, dust, pet hair, greasy food, chemicals or aerosol sprays.

Use the correct amount of adhesive based on the adhesive type.

Clean your jig frequently. For Bohning jigs, a short soak of the arm/clamp/insert in acetone will remove excessive adhesive. Never use a knife to scrape off excess glue. This will cause damage to the jig.

IDENTIFYING FLETCHING ADHESION PROBLEMS

If fletching fails with adhesive remaining on the shaft but not on the fletch, this indicates an incompatibility between the adhesive and the fletch. Ensure the adhesive you have chosen is the correct choice for your fletch.

If the fletching fails with adhesive remaining on the vanes but not the shaft, this would indicate a problem with the arrow shaft. Start by cleaning the arrow shaft using the Bohning SSR Powder, making sure to rough up the shaft surface and then rinse with hot water and allow to dry.

If the fletching fails with the adhesive remaining on both the vane and the shaft, this could indicate a setup problem with the jig, a damaged clamp, inadequate adhesive curing or a possible contamination on the shaft or vanes.

WRAPS

SOLID WRAPS

- Indicate color code when ordering
- 13 wraps per pack

4" WRAP (101.6 mm)

501031 — 4" Standard
501032 — 4" Small
501033 — 4" XS
501034 — 4" Large
501035 — 4" XL


5.5" WRAP (139.7 mm)

501071 — 5.5" Standard
501072 — 5.5" Small
501073 — 5.5" XS
501074 — 5.5" Large
501075 — 5.5" XL

7" WRAP (177.8 mm)

501051 — 7" Standard
501052 — 7" Small
501053 — 7" XS
501054 — 7" Large
501055 — 7" XL

SOLID AND REFLECTIVE WRAPS

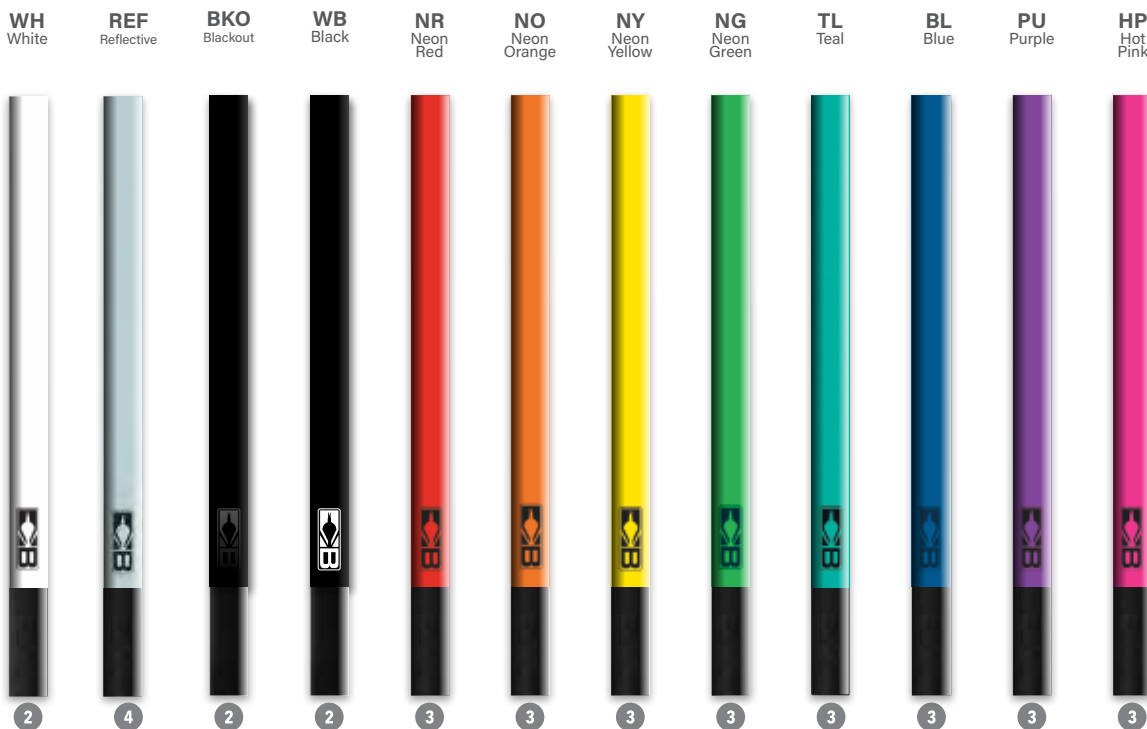

WEIGHT CODE (SEE TABLE PG. 16)

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

501001 — 4" Standard
501002 — 4" Small
501003 — 4" XS
501004 — 4" Large
501005 — 4" XL

5.5" WRAP (139.7 mm)

501061 — 5.5" Standard
501062 — 5.5" Small
501063 — 5.5" XS
501064 — 5.5" Large
501065 — 5.5" XL

7" WRAP (177.8 mm)

501041 — 7" Standard
501042 — 7" Small
501043 — 7" XS
501044 — 7" Large
501045 — 7" XL

TIGER WRAPS



WEIGHT CODE (SEE TABLE PG. 16)

WRAP AROUND NUMBER DECAL

- 16 sets of numbers 1-12
- Fits arrows up to standard diameter :
19/64" / 0.296" (7.54mm)

501012WA



PRO TIP:

Excellent way to identify the best arrows in a set

HIGH DEFINITION WRAPS

WTH	WHD	BIRCH	US	IF	FR	LE	CONF	CANF	UKF	AUSF	RFL	GFL	FBGH	FBC	DC	RE	NOC	CAMO1	PC	YAB	CYE	CBL	CRD
Whitetail Hunter	White Deer	Birch Bark	Stars & Stripes	Industrial Flag	First Responder	Law Enforce	Conf Flag	Canadian Flag	UK Flag	Australian Flag	Red Flannel	Green Flannel	Fred Bear Grouse Haven	Fred Bear Camo	Digital Camo	Realtree Edge	Neon Orange Camo	Camo HD	Pink Camo	Yellow Airbrush	Crested Wrap Yellow	Crested Wrap Blue	Crested Wrap Red
																							
1	2	2	1	1	1	1	1	1	1	1	2	1	1	1	1	1	2	1	1	1	1	1	1

WEIGHT CODE (SEE TABLE PG. 16)

HIGH DEFINITION WRAPS

WSPT	BS	HS	CB	TGT	CT	KM	KH	KP	BX	GX	YX	OX	RX	PF	BWF	GWF	RWF	TF	CF	BLL	BH	WLP
White Spatter	Blue Sky	Hot Sun	Cool Blue	Target Face	Caution Tape	Kryptek Mandrake	Kryptek Highlander	Kryptek Pontus	Blue X-Ray	Green X-Ray	Yellow X-Ray	Orange X-Ray	Red X-Ray	Purple Flame	Blue & White Flame	Green & White Flame	Red & White Flame	Tribal Flames	Camp Fire	Blue Lightning	Blue Hawaiian	White Leopard
																						
1	1	1	1	1	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

WEIGHT CODE (SEE TABLE PG. 16)

VISI-WRAP

- 3 sets of 12 highly reflective decal wraps
 - Fits arrows up to standard diameter:
19/64" / 0.296" (7.54mm)
- 501018BL** — Bohning Logo
501018TS — Tiger




18grains
(117 mg)

PRO TIP:

Great way to find arrows in poor lighting conditions



HIGH DEFINITION ARROW WRAPS

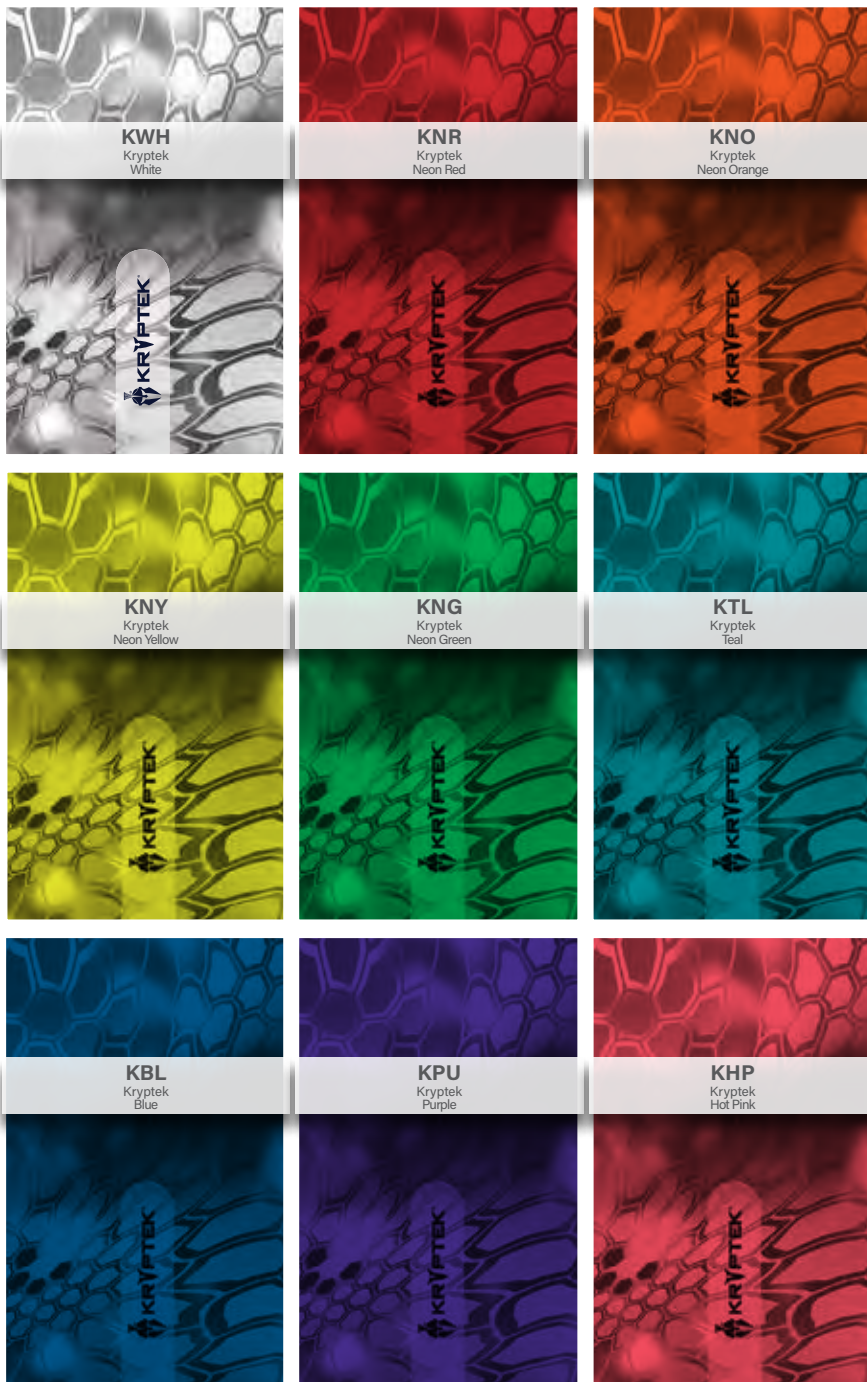


PRO TIP:

Applying arrow wraps:

Ensure your hands are clean and free of contaminants that may adversely affect adhesion. Remove wrap from backing, placing wrap adhesive side up on a mouse pad or other semi-soft surface. Align shaft with the edge of the wrap and roll with steady motion and downward pressure. Once wrap is applied, roll the arrow between your hands to fully activate the adhesive. Place the index fletching over the wrap seam to help secure the wrap.

ARROW WRAP FIT GUIDE

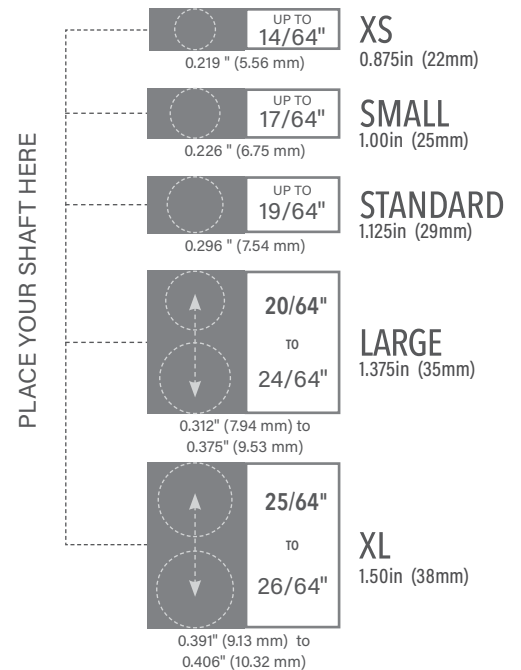

WEIGHT CODE

WEIGHT OF SINGLE WRAP IN GRAINS

	1	2	3	4
4" WRAP				
XS	4.2 gn (272 mg)	5.4 gn (350 mg)	8.4 gn (544 mg)	
SM	4.8 gn (311 mg)	6.2 gn (402 mg)	9.5 gn (616 mg)	
STND	6.0 gn (389 mg)	7.7 gn (499 mg)	11.9 gn (771 mg)	
LG	6.5 gn (421 mg)	8.4 gn (544 mg)	13.0 gn (842 mg)	
XL	7.2 gn (467 mg)	9.2 gn (596 mg)	14.3 gn (927 mg)	
5.5" WRAP				
XS	5.8 gn (376 mg)	7.4 gn (480 mg)	11.5 gn (745 mg)	
SM	6.6 gn (428 mg)	8.5 gn (551 mg)	13.1 gn (849 mg)	
STND	8.3 gn (538 mg)	10.6 gn (687 mg)	16.4 gn (1063 mg)	
LG	9.0 gn (583 mg)	11.5 gn (745 mg)	17.8 gn (1153 mg)	
XL	9.9 gn (642 mg)	12.7 gn (823 mg)	19.7 gn (1277 mg)	
7" WRAP				
XS	7.4 gn (480 mg)	9.4 gn (609 mg)	14.6 gn (946 mg)	
SM	8.4 gn (544 mg)	10.8 gn (700 mg)	16.7 gn (1082 mg)	
STND	10.5 gn (680 mg)	13.5 gn (875 mg)	20.9 gn (1354 mg)	
LG	11.4 gn (739 mg)	14.6 gn (946 mg)	22.7 gn (1471 mg)	
XL	12.6 gn (816 mg)	16.2 gn (1050 mg)	25.1 gn (1626 mg)	

- 1 = HIGH DEFINITION MATERIAL
- 2 = NEON MATERIAL
- 3 = SOLID COLOR MATERIAL
- 4 = REFLECTIVE MATERIAL

CUSTOM VANES AND WRAPS

CUSTOM ARROW WRAPS AND BLAZER VANES

- Color options:
 - Wraps: All colors including patterns
 - Blazer Vanes: Solid colors only
- Order 50 wraps minimum
- Order 1,000 vanes minimum (must be single color)
- Call 231-229-4247 for more info
or email: info@bohning.com

ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!






Blazer®

PRO TIP: Introduced in 2004, the Blazer Vane was designed for hunters and target shooters alike. The Blazer vane allows you to switch from field points to broadheads with minimal adjustment. This revolutionary product is still the #1 vane in the world.

Blazer®

BLAZER® VANE
THE WORLD'S #1 VANE!

10831 — 36 pk
10832 — 100 pk
10833 — 1000 pk




STIFFNESS: 6.0




PRO TIP:

Reader's Choice Gold
Best Fletching
since 2005.
- **Bowhunting
World**

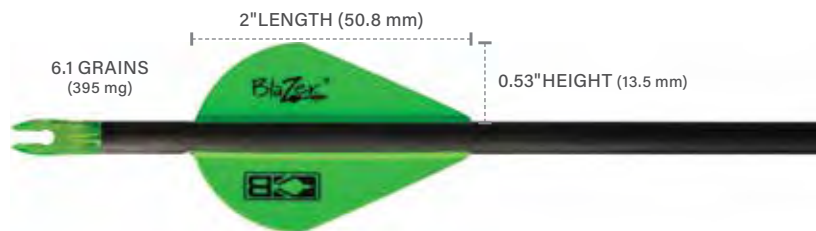

PRO TIP:

Made out of the
ultra-durable Blazer
vane material. Time-
tested, performance
proven.

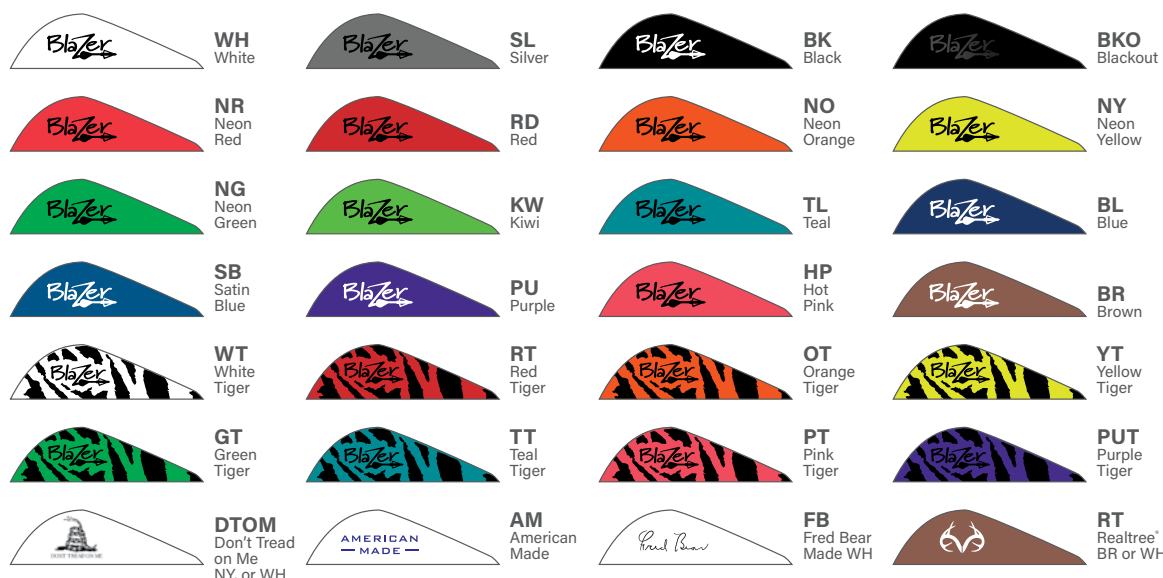

Blazer®

ALL COLOR
VANE AND WRAP
COMBO PACKS

- Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

101042

- Includes:
 - 12 arrow wraps (standard size)
 - 36 True Color Blazer® vanes



101042BS
Blue Sky
Combo




101042CT
Caution Tape
Combo



101042FR
First Responder
Combo




101042HS
Hot Sun
Combo





© **PRO TIP:** One factor in choosing a vane is its stiffness. Bohning has developed a stiffness scale to help you dial in your perfect arrow setup. On a 1 to 10 scale, 1 is the most flexible and 10 is the stiffest.



Blazer®

TRUE COLOR
BLAZER® VANE

10831 — 36 pk
10832 — 100 pk
10833 — 1000 pk



3D



STIFFNESS: 6.0



© **PRO TIP:**
Same great
Blazer vane with
enhanced
graphics



Blazer®

TRUE COLOR VANE
AND WRAP COMBO
PACKS


- Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

101040

- Includes:
 - 12 arrow wraps (standard size)
 - 24 True Color Blazer® vanes
 - 12 white Blazer® vanes



101040AF
American Flag
Combo

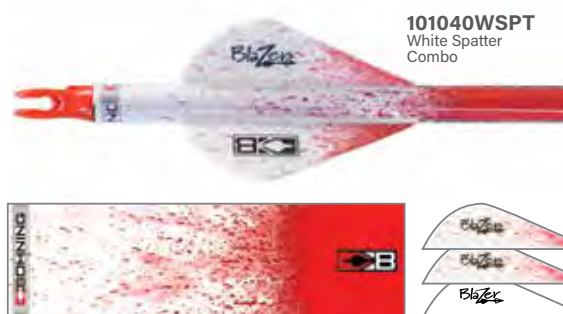

101040WSPT
White Spatter
Combo

No other vane manufacturer does color like Bohning. Our 4 color printing process gives us the ability to make you stand out in the crowd. With over 50 color choices of Blazer Vanes, you can make your arrow set-up unique. Remember at Bohning: "It's In Our Vanes!"

ALL BOHNING
VANES ARE:

MADE IN
USA




Blazer®

BLAZER®
COMBO PACK

Includes:

- 12 white Blazer® vanes
- 24 color Blazer® vanes

101050 — 36 pk



STIFFNESS: 6.0



WH/RD
White and Red



WH/NY
White and Neon Yellow



WH/HP
White and Hot Pink



WH/NO
White and Neon Orange



WH/NG
White and Neon Green



WH/AF
White and American Flag




BlazerX2®


BLAZER X2®

10762 — 100 pk

10763 — 1000 pk



STIFFNESS: 6.5



WH
White



BK
Black



NR
Neon Red



RD
Red



NO
Neon Orange



NY
Neon Yellow



NG
Neon Green



BL
Blue




SB
Satin Blue



PU
Purple



HP
Hot Pink

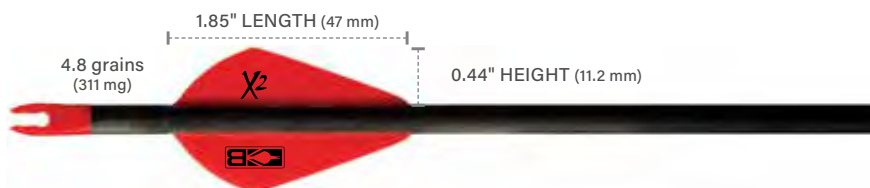

PRO TIP:
Made of Blazer
Vane material.



Bohning Pro Staff - J. Espana



GRIFFIN

More time shooting, less time re-fletching


ENGINEERED FOR GREATNESS

- DURABLE AND ACCURATE
- FLIES TRUE IN ANY TYPE OF WIND
- SPINS TWICE AS FAST: TWISTED RIBBON DESIGN

1.2 grains

0.21 in.
5.3 mm

1.0 in. (25.4 mm)



OLYMPIC RECURVE VANE

VIRTUALLY INDESTRUCTIBLE:

Won't tear or crimp even on a pass-through!

FLETCH THE WAY YOU WANT:

Tape or glue, use a jig or attach by hand



(ACTUAL SIZE)




PRO TIP:


Can be fletched using glue or tape

- For Olympic recurve and compound using micro-diameter arrows
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation — spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs

101055 — 40 pk



STIFFNESS: 3.5


WH
WhiteSL
SilverBK
BlackRD
RedNO
Neon
OrangeNY
Neon
YellowNG
Neon
GreenSB
Satin
BlueHP
Hot
Pink



HEAT VANE

- Made out of the ultra-stiff Heat® vane material for maximum arrow stabilization, arrow control, and quiet flight

101036 — 36 pk
101037 — 100 pk
101038 — 1000 pk



STIFFNESS: 9.0



PRO TIP:
Blazer Bond or Fletch-Fuse glues are recommended for this vane.




X3® VANE

Heat® vane material for maximum arrow stabilization, arrow control, and quiet flight


101051 — 36 pk
101052 — 100 pk
101053 — 1000 pk




1.75" AND 2.25" VANE
(44.5 mm and 57.2 mm)



STIFFNESS: 9.0

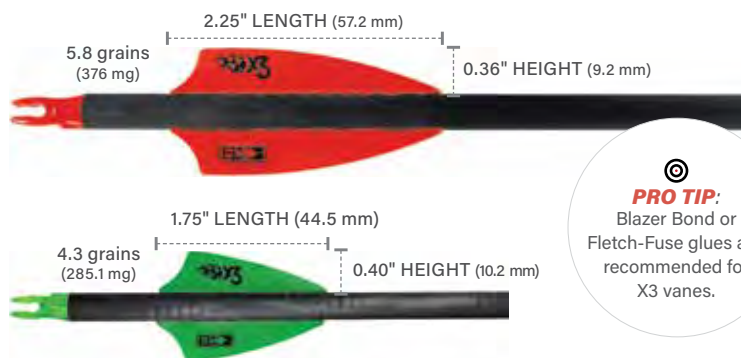


PRO TIP:
Blazer Bond or Fletch-Fuse glues are recommended for X3 vanes.

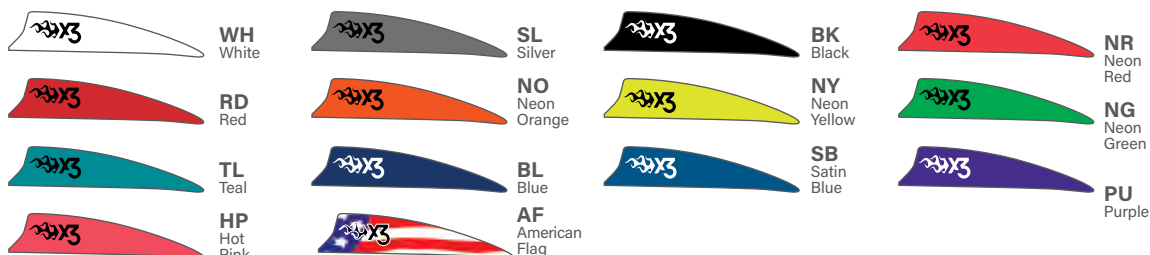

BOLT® VANE FOR USE WITH CROSSBOWS

- Made of ultra-stiff vane material

101033 — 36 pk
101034 — 100 pk
101035 — 1000 pk



STIFFNESS: 8.4



PRO TIP:
Blazer Bond or Fletch-Fuse glues are recommended for this vane.






X VANE®

- Made of Blazer® vane material

10771 — 36 pk
10772 — 100 pk
10773 — 1000 pk




3.5" VANE
(88.9 mm)



STIFFNESS: 5.8




3" VANE
(76.2 mm)



STIFFNESS: 6.1




2.25" VANE
(57.2 mm)



STIFFNESS: 6.7



1.5" AND 1.75" VANE
(38.1 mm and 44.5 mm)



STIFFNESS: 6.7



ALL BOHNING
VANES ARE:

MADE IN
USA



WH
White



SL
Silver



BK
Black



NR
Neon
Red



RD
Red



NO
Neon
Orange



NY
Neon
Yellow



NG
Neon
Green



TL
Teal



BL
Blue



SB
Satin
Blue



PU
Purple



HP
Hot
Pink



AF
American
Flag



UKF*
Union Jack
(1.75" only)

*while supplies last






ZEN® VANE

- Made of Blazer® vane material
- Solves clearance issues when using large diameter shafts

101047 — 36 pk
101048 — 100 pk
101049 — 1000 pk



STIFFNESS: 6.5

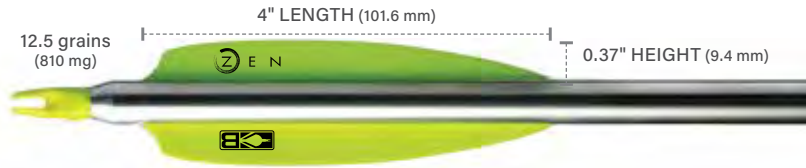

WH
White



NR
Neon Red



NY
Neon Yellow



BL
Blue



HP
Hot Pink



SL
Silver



RD
Red



NG
Bright Green



SB
Satin Blue



UKF
Union Jack



BK
Black



NO
Neon Orange



TL
Teal



PU
Purple



AF
American Flag

ALL BOHNING
VANES ARE:

**MADE IN
USA**



ICE VANE

- Made of Blazer® vane material
- Ideal for minimizing crosswind drift

101021 — 36 pk
101022 — 100 pk
101023 — 1000 pk



STIFFNESS: 7.0



WH
White



NR
Neon Red



NY
Neon Yellow



BL
Blue



HP
Hot Pink



SL
Silver



RD
Red



NG
Neon Green



SB
Satin Blue



BK
Black



NO
Neon Orange



TL
Teal



PU
Purple



BRONCO® VANE

- Made of Blazer® vane material

10501 — 36 pk

10502 — 100 pk

10503 — 1000 pk



3" VANE

(76.2 mm)



STIFFNESS: 6.2

4" VANE

(101.6 mm)



STIFFNESS: 5.7



PRO TIP:
Long profile similar to traditional feathers but with superior durability

WH
WhiteBK
BlackRD
RedNO
Neon OrangeNY
Neon YellowNG
Neon GreenSB
Satin BlueHP
Hot Pink


AIR® VANE

- Made of Blazer® vane material
- Great for long distances and smaller diameter shafts
- Ideal for minimizing crosswind drift

101026 — 36 pk

101027 — 100 pk

101028 — 1000 pk



STIFFNESS: 7.0

WH
WhiteSL
SilverBK
BlackNR
Neon RedRD
RedNO
Neon OrangeNY
Neon YellowNG
Neon GreenTL
TealBL
BlueSB
Satin BluePU
PurpleHP
Hot PinkUKF*
Union JackCF*
Camp Fire

*While supplies last

FOLLOW BOHNING ON FACEBOOK, INSTAGRAM, AND TWITTER



RANDY MORROCO




LEE FORD



PEDRO AMPUERO



DICK SMITH

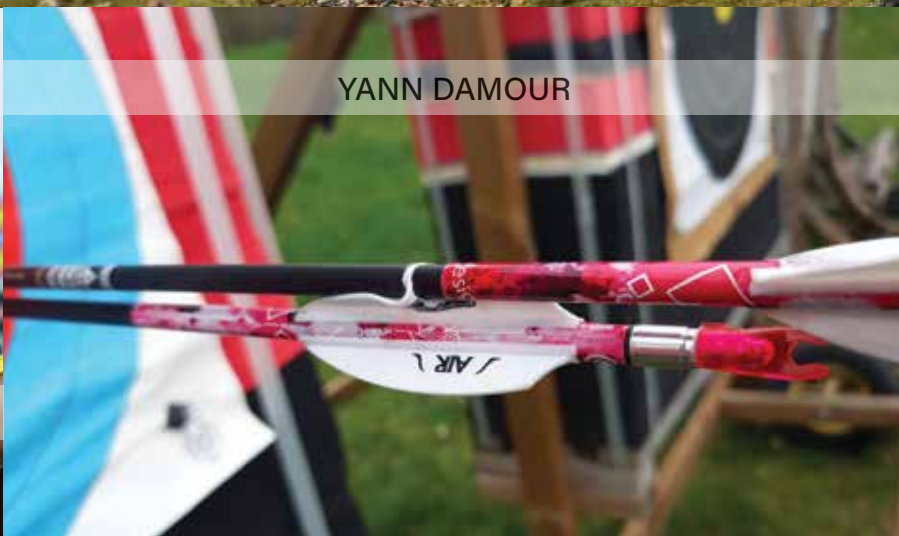

YANN DAMOUR



DAN REED



TOM NELSON



JOHN WHEELER



DANIEL CARLTON

QUIVERS

BRUIN

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with the Lever-Lock mounting system

201030 — Indicate hood and liner color

HOOD COLOR CHOICES



BK
Black



CF
Carbon
Fiber



MOC
Mossy Oak®
Break-up
Country



KH
Kryptek®
Highlander



RE
Realtree®
Edge

LINER COLOR CHOICES



BK
Black




RD*
Red

* Red liner available only
with black or carbon
fiber hoods

MADE IN
USA

FITS
ALL
ARROW
SIZES

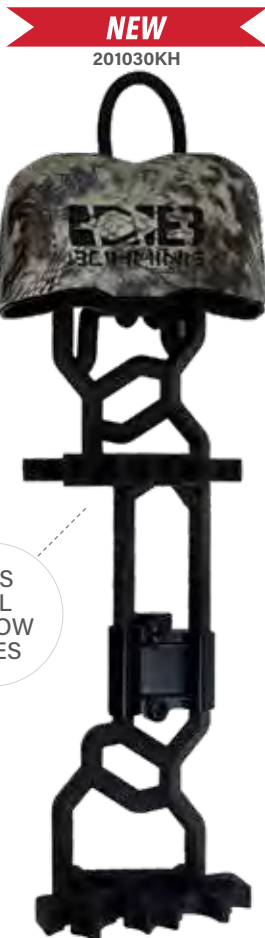

NEW

201030KH

201030BKRD



201030BKBK



201030CFRD



201030CFBK



201030MOC



201030RE



LYNX®

- Dual-retainer quiver
- Molded hood and liner for quiet storage of any broadhead style
- Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

1038 — Black

201013RE — Realtree Edge®

201013MOC — Mossy Oak® Break-Up Country

HOOD COLOR CHOICES



BK
Black



RE
Realtree®
Edge



MOC
Mossy Oak®
Break-up
Country

MADE IN
USA

201013MOC



1038



201013RE



LEVER LOCK

- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click)

1073 — Lever Lock

POCKET QUIVER

- Dimensions: 3.75" x 5.125" x 1.25"
(95 mm x 130 mm x 32 mm)
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Made in USA

201035BK - Pocket Quiver

201035BK-10 - 10 Pack

Replacement Parts

201036BK - Body

201037BK - Clip

201038 - Retainer Cap



**MADE IN
USA**

Securely holds 6 arrows or bolts

NEW

POCKET QUIVER SNAPFIT DISPLAY

Order 12 Pocket Quivers and receive a free SNAPFIT table top display. Great for impulse point of purchase buying

201035BK-12SF



BOW CASES

ADULT BOW CASE

- Dimensions: 44.5" (113 cm) x 19.5" (50 cm)
- Fits bows up to 37" (94cm) axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura® Nylon



BK
Black Sky



701037

ADULT BOW CASE INTERIOR - COLOR MAY VARY
Interior dimensions: 43.5" x 18" (110.5 cm x 45.7 cm)

THE SHELTER

BOW CASE

- Dimensions: 46" (117 cm) x 18.5" (47 cm)
- 4 outer pockets, including one arrow pocket
- Made of premium Cordura® Nylon

701045CAMO

The Shelter, Sling/
Case Combo

701043CAMO

Case Only

SLING

- Fits bows from 28" (71 cm) to 38" (97 cm) axle to axle
- 2 outer accessory pockets
- 2 end clips for added security

701044BK — Bow Sling Only



SHELTER BOW CASE INTERIOR
Interior dimensions: 44.5" x 18" (113 cm x 46 cm)

USE CARRYING HANDLE, STRAP, OR SLING. PERFECT WAY TO CARRY AND PROTECT YOUR BOW.



YOUTH BOW CASE

- Dimensions: 40" (102 cm) x 15.8" (40cm)
- Fits most youth bows (including Genesis™)
- Outer arrow storage pocket and 3 zippered interior pockets

701036

🎯 **PRO TIP:**
Matching Tube Quiver available!



BK
Black Sky

NEW
BLACK SKY EDITION



BKCA
Black and Camo



Three zippered interior mesh pockets

YOUTH BOW CASE INTERIOR
Interior dimensions: 38" x 15" (96.5 cm x 38.1 cm)

TUBE QUIVER

- Dimensions: 19" (48 mm)
- 2 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 STD sized arrows
- Ambidextrous
- Mesh storage pocket

701029



BK
BlackSky



BKCA
Black and Camo



GYOR
Gray and Neon Orange

NEW
BLACK SKY EDITION

(2) Arrow Tubes: 18"+ (457 cm) long - 1.2" (30 cm) I.D.



ACCESSORIES

SHOOTER STOOL

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

701058BK — Stool with arrow tubes/umbrella holder

701055BK — Stool only

🎯 **PRO TIP:**

STOOL CAPACITY:
300 pounds
(136 kg)



BUILT IN
COOLER



ADULT TARGET QUIVER

- 4 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 standard sized arrows
- 2 zippered storage compartments:
- Easy to access mesh and pencil storage areas
- Constructed with premium Cordura® and Ripstop nylons
- Superior durability and water repellent
- Fits up to 3" (7.5 cm) belt

701041BK



Arrow Tubes:
17" (43 cm) long - 1.2" (3 cm) I.D.
Main Pocket:
11" (28 cm) x 5" (13 cm)
Upper Pocket:
4.5" (11 cm) x 5" (13 cm)



ACCESSORY POUCH

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant
- Strong and comfortable belt Loop - Fits up to 2.5" (6 cm) belt



Dimensions:
6.25" (16 cm) Width
5.75" (15 cm) Height
3.5" (9 cm) Depth

ACCESSORIES



PRO TIP:
New, internal wear guard for a sleeker design.

SLIP-ON ARMGUARD

- Durable yet flexible and soft compression-fit material
- Easy on and off; protects the entire forearm

801009

SLIP-ON ARMGUARD SIZING (APPROXIMATE)					
SIZE	LENGTH	SMALL END RELAXED	LARGE END RELAXED	SMALL END STRETCHED	LARGE END STRETCHED
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)
M	9" (22.9 cm)	7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)

color choices



PU Purple
HP Hot Pink
RD Red
NO Neon Orange



NG Neon Green
BL Blue
BK Black
CAMO Camo



WEB ARMGUARD

- Open design for maximum ventilation
- Durable and flexible, with adjustable elastic bands for easy on and off

801040BK



D-FLECTOR ARMGUARD

- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center


801092

solid color choices




WH White
BK Black
NY Neon Yellow

translucent color choices



RU Ruby
TG Tangerine
KW Kiwi
TL Teal




EB Electric Blue
PU Purple
RS Rose Pink



3-STRAP ARMGUARD

- Made of heavy-duty cordura — double stitched to prevent fraying
- Protects arm and holds loose clothing away from bow strings
- Adjustable quick disconnect buckle straps


1689

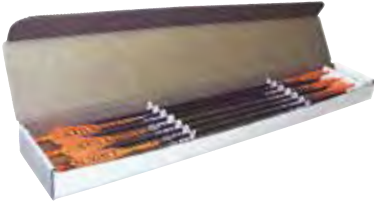

UNIVERSAL ARROW BOX

- Each box holds 12 arrows, up to 36" (91 cm)
- Dimensions: 36.5" x 6" x 2.5"
(93 cm x 15 cm x 6 cm)

1623 — 50 pk



"BOA" AND "PYTHON"
ARROW PADS

- Boa holds 12 arrows of any size
- Python holds 12 arrows
Sizes .219" (5.56 mm) to .359" (9.12 mm)

16092 — Boa
801047 — Python



ARROW PEN FERRULES

- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to PaperMate® 1.0mm (not included)

990004BK

PRO TIP:

Turn arrow scraps into fletching showpieces. Our Arrow Pen Ferrules easily turn a broken arrow piece into a sellable product, or an advertising tool.



BROADHEAD
WRENCH

- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point
- Color may vary

1619

MADE IN
USA



BOW GRIP/SIGHT
WINDOW PAD

- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak® Break-Up Infinity

1602 — 2 Pads



WIND CHECK

- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy one-hand use

1612 — 0.21 oz (6 grams)



ARROW LUBE

- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based

301023 — 1.18 oz tube
(35 ml)

BULK OPTIONS:

301023-16 - 16 Tubes
301023-250 - 250 Tubes
301023BOWL - Bowl + 16 pk

STRING ACCESSORIES

SERVE-LESS PEEP IT®

- Serve-less peep site
- Time saver installs without serving
- Durable construction
- Made in USA

SERVE-LESS PEEP IT

802002 — 1/8"*
802003 — 3/16"
802004 — 7/32"
802005 — 1/4"

WITH ALIGNER*

802006 — 3/16"
802007 — 7/32"
802008 — 1/4"

THREADED*

802009 — 1/8"
802010 — 1/4"

SERVE-LESS PEEP IT 24 PACK

802012 — 1/8"*
802016 — 3/16"
802014 — 7/32"
802015 — 1/4"

WITH ALIGNER - 24 PACK*

802026 — 3/16"
802027 — 7/32"
802018 — 1/4"

THREADED - 24 PACK*

802019 — 1/8"
802011 — 1/4"

* available in black (BK) only

**THIS PRODUCT IS NOT DESIGNED TO BE SERVED IN.
DOING SO WILL RESULT IN DAMAGE TO YOUR STRINGS.**

CONVERSION CHART

1/8"	0.125"	3.18 mm
3/16"	0.187"	4.76 mm
7/32"	0.218"	5.54 mm
1/4"	0.250"	6.35 mm

COLOR CHOICES



🎯 **PRO TIP:**

PERFECTLY ALIGNED FOR A CLEAR SIGHT PICTURE. The Peep It® stays in place even better than a standard tied-in peep sight. It is also available as a Threaded Peep It, which accepts clarifiers, verifiers, and Peep It with aligner.



🎯 **PRO TIP:**

INSTALL A PEEP SIGHT IN 10 SECONDS!

Bohning's Serveless Peep It® and Anchor Knot are huge time savers because you don't need to serve them.

No more accidentally cutting or burning your bowstring during the peep removal process!

STRING ACCESSORIES

ANCHOR KNOT

- Serve-less cable attachment for drop away rest cord
- Time Saver
- Durable construction
- Made in USA

802001 — Anchor Knot
802017 — 24 Anchor Knots

This product is not designed to be served in. Doing so will result in damage to your strings.



BK
Black



RD
Red



BL
Blue



PK
Pink

color choices



STRING NOCKS

- Creates a positive nocking point for consistent shots
- Quick and easy to install

Hunter (black liner):
 for 12-14 strand strings
 —5.4 grains (350 mg)

Cam (red liner):
 for 16-18 strand strings
 —7.4 grains (480 mg)

Cam String Nocks

1065 — 6 pk
1068 — 100 pk
1071 — 1000 pk

Hunter String Nocks

1064 — 6 pk
1067 — 100 pk
1070 — 1000 pk



STRING SEPARATOR

- Fast and easy installation of serving, peeps, silencers, etc.
- Easily inserts into strands without damaging, twist into separate strings
- 2" (50.58mm) x .625" (15.87mm) x 1" (25.4mm)

1601 — Separator



KISSER BUTTON

- Helps maintain a consistent anchor point every shot
- Lightweight and durable, 0.5" (12.7 mm) diameter
- Easy installation with 2 enclosed clips

1664 — Kisser w/ clips
801081 — 100 pk



"SLIM" PEEP


- Durable, high-impact and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm) tubing, bulk peeps do not

1668 — Peep with tube
1640 — 50 pk (peep only)

STRING WHISKERS

- Two pieces per package, 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

1051 — 1Pair
1635 — 50 Pair

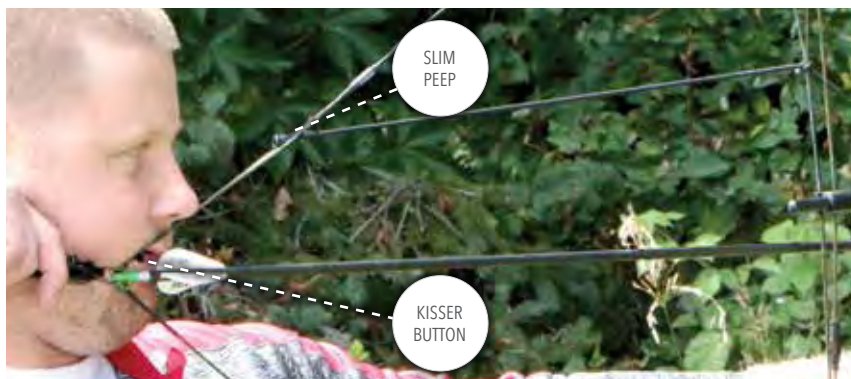

SLIM
PEEP

KISSER
BUTTON

THE STRIP-PRO

NEW

- Strips your arrow shaft of all fletchings, glue and arrow wrap
- New and improved handle for better grip/ease of use.
- Safe for all arrows/diameters
- Extra blade storage in Handle
- Replacement blades available

1524 — Strip-Pro

801026 — Blades: 3pk



MADE IN
USA

🎯 **PRO TIP**

TO REMOVE FLETCHINGS:

Use the "Strip-Pro" by Bohning to strip the fletchings from arrow shafts. Clean with SSR powder on a scour pad to prepare for new fletching.

🎯 **PRO TIP:**

3 WAYS TO REMOVE WRAPS:

1. Use the "Strip-Pro" to remove the wrap.
2. Use a hair dryer to soften the adhesive and peel the wrap.
3. Use boiling water to soak the wrapped arrow shafts in and peel the wrap off once softened.

To remove remaining wrap adhesive, use SSR powder on a scour pad in hot water to scrub off.

NEW



SSR

- Concentrated cleaning powder removes dirt, grease, residue and contaminants
- For carbon, aluminum and fiberglass shafts
- Use on a scour pad with hot water to scrub, then rinse

801052 — Single-use pk - 1 tsp (4.9 ml)

801053 — Shaker bottle - 2.65 oz (78.4 ml)



MADE IN
USA

BOW SQUARE

- No more having to guess or clip and unclip the bow square continuously to ensure the loop is in the correct place! Simply slide the indicator back and forth as need to start and finish your D-loop or nock sets.
- Easy to read brace height measurements
- Use your own nocks for the most accurate fit possible
- Use the flat side to check cam lean of your bow

NEED



POWERGRIP

- A blend of tightly braided Spectra and nylon yarn
- Resin coated for durability and good grip
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)
Contains 50 yards (45.7 m)

801034 — 0.021" (0.53mm)

801035 — 0.025" (0.64mm)



NYLON SERVING THREAD

- Traditional nylon serving thread
- Use for end serving, peeps and nocks
- 0.018" (0.46mm)
Contains 100 yards (91.4 m)

1616 — 0.018" (0.46mm)



CROSSBOW SERVING THREAD

- Designed for high performance crossbow strings
- 0.030" (0.76mm)
Contains 45 yards (41.1 m)

801011BK — 0.030" (0.76mm)



#62 BRAID SERVING THREAD

- Braided for superior grip and durability
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)
Contains 60 yards (54.9 m)

1626 — 0.021" (0.53mm)

1627 — 0.025" (0.64mm)



HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" (0.36mm) white turns clear when served tightly
- 0.014" (0.53mm)
Contains 120 yards (109.7 m)
- 0.021" (0.64mm)
Contains 75 yards (68.6 m)
- 0.024" (0.64mm)
Contains 45 yards (41.1 m)

801031 — 0.014" (0.36mm)

801032 — 0.021" (0.53mm)

801033 — 0.024" (0.61mm)

color choices



WH
White

NO
Neon
Orange

NG
Neon
Green



BL
Blue



RD
Red



BK
Black




#62 XS SERVING THREAD

- 20% stronger than regular serving thread
- 0.018" (0.46mm)
Contains 100 yards (91.4 m)
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)

801001 — 0.021" (0.53mm)

801010 — 0.018" (0.46mm)

COLOR CHOICES



BK
Black

RD
Red

NG
Neon
Green



LOOP ROPE

- 0.196" (2.0 mm) BCY #24 polyester D-loop rope

801002 — 39" (1m)

801003 — 100 ft (30.5m)

color choices



BK
Black

RD
Red

NG
Neon
Green



MINI-SERVER®

- Great for travel and quick fixes
- Eliminates the need for a cable spreader
- 2.06" x 1.4" x 0.875" (52.4 x 35.6 x 22.2 mm)
- Contains 27' (8.2 m) of #62XS 0.021" (0.53mm) serving in black and white

801017 — Server

801024BW — 2 pk spool replacement



SERVE-TITE

- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- No thread included

16150 — Tool Only

ACCESSORIES

CROSSBOW



CROSSBOW LUBE KIT

- Includes:
 - 1 tube of Lightning Lube — 1.18 oz (35 ml)
 - 1 tube of Xccelerator Wax — 0.57 oz (16.1 grams)

801005



LIGHTNING LUBE™

- Silicone-based, odorless rail lube
- No-mess foam applicator
- Provides a protective film for reduced friction and increased velocity

1363 — 1.18 oz (35 ml) tube
941019 — 16 pk bulk
941019BOWL - Bowl and 16 pk
1363-250 - 250 Tubes



TOP MOUNT

- Parallel quiver mounting system
- Installs easily to the right or left side of the sight rail without removing the scope
- Slim and adjustable design allows for easy access to arrows and reduction in forward weight of crossbow
- Includes both allen head and thumb screw

801012



MULTI-FLETCHER®

- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Capable of fletching crossbow bolts up to 0.42" (10.7 mm) OD
- Can fletch 1° to 3° right, 1° to 3° left, or straight
- See page 2 for more information

601055 — Multi-Fletcher®



CROSSBOW TOWER®

- Capable of fletching crossbow bolts up to 0.35" (8.9 mm) OD
- Can fletch bolts either 1û right offset or 3û right helical
- See page 3 for more information

601001 — Crossbow Tower®

ACCESSORIES

CROSSBOW



BOLT™ VANE

- See page 22 for more information

101033 — 36 pk
101034 — 100 pk
101035 — 1000 pk



CROSSBOW
SERVING THREAD

- See page 37 for more information

801011BK



CROSSBOW NOCKS

- See page 7 for more information

.300" (7.70 mm) Half Moon Nock .300" (7.70 mm) Flat Nock

401008 — 12 pk
401009 — 100 pk
401010 — 1000 pk

401014 — 12 pk
401015 — 100 pk
401016 — 1000 pk



PROFESSIONAL CRESTING KIT

- The kit includes:
 - One crester (made with maple base)
 - Six 1 oz jars of Crest-Lac paint: black, red, yellow, blue, silver, and gold
 - Four paint brushes:
 - Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with English and metric doubles as pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V

801083 — Cresting Kit

801084 — Creater Only



DIP KIT

- Includes:
 - 1 glass dip tube
 - 1 arrow hanger
 - 2 pints (946 ml) of white Crest-Lac
 - 2 pints (946 ml) of clear Crest-Lac
 - 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

801094 — Dip Kit

801085 — Cresting Kit and Dip Kit Combo

801095 — Dip Tube

801098 — Arrow Hanger

801100 — Dip'n Plug Ring





PRO TIP:

CROWN DIPPING AND CRESTING

Bohning offers many options for this purpose, ranging from clearcoats to white or colors, in both solvent-based and water-based finishes. Bohning offers water-based Crest-Lac paint, which is very low odor, easy to thin to your desired consistency using distilled water, and is easy to clean up.

Bohning's Fletch-Lac paint is the original solvent-based arrow paint, it is time tested, covers all arrow surfaces extremely well with minimal coats, and thins well with Bohning Fletch-Lac Thinner.

Crown dipping for both Fletch-Lac and Crest-Lac paint, follow the steps below for the best arrow finish:

1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For Carbon or Aluminum arrows, scrub shaft surface with Bohning SSR powder on a scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
2. Pour paint into dip tube making sure to adjust the viscosity (thickness) with the correct thinner for the paint that you are using. Stir paint, allow to sit for 20 minutes, pop any surface bubbles in the paint.
3. Hang arrows using the Bohning Arrow hanger.
4. Plug hollow arrows with Bohning Dip'n Plug ring.
5. Dip arrows to the desired depth in the paint, pull out of paint until paint starts to drip, then dip the arrows back into paint. Allow the paint to stream off the shafts until it is just dripping and then hang to dry over a surface that can collect the excess paint.
6. Allow paint to dry completely before coating with another paint or clearcoat. If coating with another paint, it is recommended that you lightly sand the painted surface of the shaft and then wipe with a tack cloth.
7. Pour leftover paint back into cans to save for the next round of arrows.

Cresting for both Fletch-Lac and Crest-Lac paint.

1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For carbon or aluminum arrows, scrub the shaft surface with Bohning SSR powder and a dish scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
 - c. For Dipped/Painted arrow shafts: Wipe dipped/painted end of shaft with a tack cloth.
2. Mix desired paints. Determine your desired cresting pattern.
3. Place arrow onto the Bohning Crester, making sure to put the nock end tight against the arrow stop.
4. Proceed with cresting the arrow. Leave the crester spinning with the arrow in place until the paint is dry.
5. If a clearcoat top coat is desired for the arrow, using Crest-Lac clear is strongly recommended as it will not dissolve the cresting lines.

For unfinished wooden arrows, a finish is essential for the entire arrow shaft.



TRADITIONAL



FLETCH-LAC

- Industry standard for over 50 years — top choice of custom arrow shops worldwide!
- Solvent-based crestring paints that dry to a hard, chip-resistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

1412 — 1 oz Jar (17.2 ml)
 1105 — Pint (473.1 ml)
 1106 — Quart (946.4 ml)
 1107 — Gallon (3.79 l)



CREST-LAC

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

301011 — 1 oz Jar (17.2 ml)
 301014 — Pint (473.1 ml)
 301012 — Quart (946.4 ml)
 301013 — Gallon (3.79 l)

GLOSS COLOR CHOICES



FLORESCENT COLOR CHOICES



matte color



METALLIC COLOR CHOICES



GLOSS COLOR CHOICES



FLORESCENT COLOR CHOICES



METALLIC COLOR CHOICES



clear



PRO TIP:

If thinning is desired, use distilled water **NOT** paint thinner



FLETCH-LAC THINNER

- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

1131 — Pint (473 ml)

1132 — Quart (946.4)

1133 — Gallon (3.79 l)



FLETCH-LAC SEALANTS

CLEAR & BLUE CLEAR

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

1124 — BC/CL Pint (473 ml)

1125 — BC/CL Quart (946.4)

1126 — BC/CL Gallon (3.79 l)

SUPERCOAT

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

1120 — Supercoat Pint (473 ml)

1121 — Supercoat Quart (946.4)

1122 — Supercoat Gallon (3.79 l)



FEATHER-DRI

- Protect your fletchings from the weather
- Colorless, odorless, water-repellent powder
- Includes bag to shake powder onto fletched feathers
- Environmentally safe

1611



FEATHER TOWER®

- See page 3 for more information

601010

APPAREL

NEW



BLUE RETRO LOGO HOODIE

Comfortable standard fit sweatshirt with a retro style Bohning Logo. Jersey lined hood and metal eyelets.

- 55/45 cotton/polyester
- Sm-3XL

701060BR

NEW



BLUE RETRO LOGO TEE

Lightweight, roomy and highly breathable, these moisture-wicking, value-priced tees feature PosiCharge technology to lock in color and prevent logos from fading.

- 3.8-ounce, 100% polyester interlock with PosiCharge technology
- Sm-3XL

701009BR

NEW



FRONT

BACK

SHOOTER JERSEY

- Fabric Content - 100% polyester, 3 oz
- Moisture management/antimicrobial performance fabric
- Sm-3XL

701075

NEW



BOHNING SEASON HOODIE

Cozy sweatshirt in our core weight.

- 7.8-ounce, 50/50 cotton/poly fleece
- Air jet yarn for a soft, pill-resistant finish
- Sm-3XL

701061BS

NEW



BOHNING SEASON TEE

An indispensable t-shirt in our classic silhouette

- 5.4-ounce, 100% cotton
- 50/50 cotton/poly
- Sm-3XL

701009BS

NEW



BLUE RETRO LOGO

- An ultra-breathable cap with the patented Flexfit stretch for a comfortable fit. A silver contrast underbill adds character to this trucker-style cap.

701004BRL



LEATHER PATCH

- Mesh back
- Adjustable snap back

701043LTH



GREEN MESH

- Mesh back
- Adjustable snap back

701043GR



DISTRESSED BROWN

- Bohning's best seller
- Mesh back
- Adjustable snap back

701043TR



REALTREE™

- Hook and loop closure

701004RT

DISPLAYS

FISHBOWL DISPLAY

- 1630BOWL** - Tex-Tite - 24 pk
- 1631BOWL** - Seal-Tite - 24 pk
- 941019BOWL** - Lightning Lube - 16 pk
- 1634BOWL** - Xccelerator Wax - 16 pk
- 301023BOWL** - Arrow Lube - 16 pk
- 301025BOWL** - Fletch Fuse - 24 pk



NEW

NEW



STOCKED SNAPFIT™ DISPLAY

- Shelf capacity: 5 lbs (2.3 kg) per 4" panel
- Hook capacity: 1 lb (.45 kg) per hook
- Made from engineering-grade, recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for non-marring stability
- Slots in column caps accommodate standard foam board signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays

CALL A BOHNING REP FOR MORE DETAILS AND ORDERING: 231 - 229 - 4247



ALL DISPLAYS:



BK
Black

SNAPFIT™ DISPLAY — 8 X 8

- Includes:
 - Sixteen — 16" columns
 - Twenty-four — 8" plates
 - Includes four stabilizing feet
 - Forty-eight — 3" hooks
 - Four — 8" shelves

901051

SNAPFIT™ DISPLAY — 8 X 16

- Includes:
 - Sixteen — 16" columns
 - Twelve — 16" plates
 - Twelve — 8" plates
 - Includes four stabilizing feet
 - Sixty-four — 3" hooks
 - Eight — 8" shelves

901052

SNAPFIT™ DISPLAY — 16 X 16

- Includes:
 - Sixteen — 16" columns
 - Twenty-four — 16" plates
 - Includes four stabilizing feet
 - One hundred — 3" hooks
 - Eight — 16" shelves

901053

SNAPFIT™ DISPLAY TABLETOP

- Includes:
 - One 16" column
 - Includes one stabilizing foot
 - Ten — 3" hooks

901050

ADHESIVES

- 1304 — Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)
- 13032 — Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)
- 1316 — Alcohol Burner Replacement Wick
- 1134 — Platinum Thinner* - 1 Pint (473.1 ml)

**PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING. ONLY USE PLATINUM THINNER WITH PINT, QUART, OR GALLON SIZES OF PLATINUM THAT HAVE THICKENED WITH TIME.*

CRESTING AND DIPPING

- 1400 — Hair Line Cresting Brush
- 1401 — 1/8" Cresting Brush (3.18 cm)
- 1402 — 1/4" Cresting Brush (6.35 cm)
- 1403 — 1/2" Cresting Brush (12.7 cm)
- 801095 — Dip Tube
- 801098 — Arrow Hanger
- 801100 — Dip'n Plug Ring

FLETCHING JIGS

Blazer® Jigs and The Big Jig

- 1319 — Clamp Release Tape, 3 pieces
- 13192 — Clamp Release Tape Bulk Pack, 21 Pieces
- 8250 — Blazer Straight Clamp
- 8251 — Blazer 3° Right Helical Clamp
- 8361 — Big Jig 3° Right Helical Clamp
- 8362 — Big Jig 1° Right Offset Clamp
- 601004 — Crossbow Receiver / Adapter
- 601009 — 4 Fletch Disk Adapter

Multi-Fletcher®

- 601056 — Multi-Fletcher Clamp
- 601057 — Insert, 3° Right Helical
- 601058 — Insert, 1° Right offset
- 601059 — Insert, Straight
- 601060 — Insert, 1° Left Offset
- 601061 — Insert, 3° Left Helical
- 601062 — Insert, Feather 2° Right Offset
- 601063 — Insert, Feather 2° Left Offset

Pro Class Jig

- 1351 — Straight Clamp
- 1352 — Right Clamp
- 1353 — Left Clamp
- 601020 — 1" (25cm) Vane Fletching Clamp - Griffin Vane
- 601004 — Crossbow Receiver / Adapter

Tower® Jigs

- 601011 — Center Post for .246 (6.25 cm) ID (Standard size)
- 601012 — Center Post for Pin Adapter
- 601013 — Center Post for .167" (5.50 cm) ID (F Nock size)
- 601014 — Center Post for .204" (5.18 cm) ID (A Nock size)
- 601015 — Center Post for Crossbow Bolts
- 601016 — Center Post for Swedged-end Arrows
- 601030 — Center Post for .231" (5.87 cm) ID (H.E. Nock size)
- 1200 — Arms, 1° Right Offset (red), set of 3
- 1201 — Arms, Straight (gray), set of 3
- 1202 — Arms, 3° Helical (black), set of 3
- 601007 — Arms, Impulse Straight (yellow), set of 3
- 601024 — Arms, Mylar Straight (gray w/ red clip), set of 3
- 601037 — Arms, 1° Left Offset (orange), set of 3
- 601038 — Arms, 3° Left Helical (purple), set of 3
- 601008L — Arms, Feather Left Wing (green), set of 3
- 601008R — Arms, Feather Right Wing (blue), set of 3
- 80211 — Tower Spacers, set of 3
- 601017 — Pressure Ring, Small (red)
- 601018 — Pressure Ring, Large (lime)
- 601036 — Pressure Ring, X-Large (orange)
- 1319 — Clamp Release Tape, 3 pieces
- 13192 — Clamp Release Tape, Bulk Pack (21 Pieces)

Cauldron Jig

- 601026 — Adjustable Compression Ring

QUIVERS

Bruin Quiver

- 201031 — Retainer Set
- 201032 — Tree Hanging Loop
- 1073 — Lever Lock

Lynx® Quiver

- 1045 — Retainer Set for small 166" (4.22 cm) and .204" (5.18 cm) arrows
- 10382 — Retainer Set for standard-size arrows

Pocket Quiver

- 201036BK - Body
- 201037BK - Clip
- 201038 - Retainer Cap

SERVER

- 801024BW — Mini-Server Replacement Spool with thread, 2 pk

STRIPPER TOOLS

- 15240 — The Stripper Blades, 3 pk
- 801026 — The Strip-Pro Blades, 3 pk

SHOOTER STOOL

- 701057 — Arrow tubes with clips